

INSCALE™


SUPERBENCH

THE BENCH SCALE BUILT LIKE A FLOOR SCALE

MINIBENCH



STANDARD SAFETY PLATE

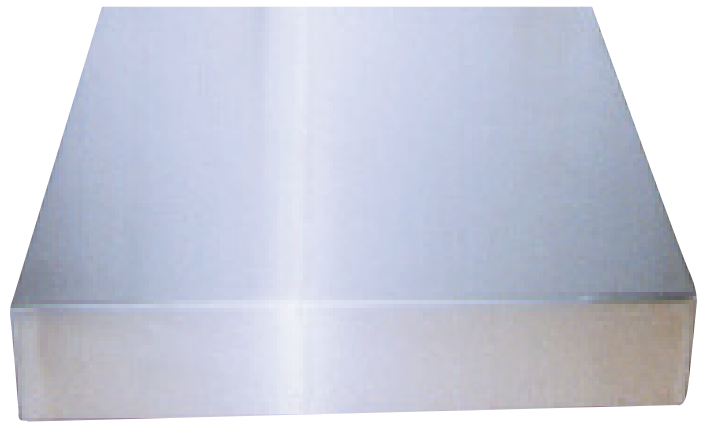

OPTIONAL STAINLESS STEEL COVER

- **RUGGED**

All welded structural steel construction. The same techniques used to manufacture the rugged **INSCALE** floor scales are used to produce the **SUPERBENCH**. No formed sheet metal bracing. No castings. Built-in overload stops. A true industrial scale.

- **VERSATILE**

Supplied with smooth or 4-way safety plate as standard. Available with optional stainless steel cover. Scale can be mounted on bench, stand or floor. Available with accessories such as short or tall indicator column, portable cart, pit frame, etc. Available in a full range of sizes and capacities.

- **HIGHEST QUALITY**

Accuracy conforms to **NIST H-44**. Durability backed by manufacturer's three year warranty.

INSCALE SUPERBENCH

SPECIFICATIONS

MINIBENCH

INSCALE NUMBER	PLATFORM SIZE	SCALE CAPACITY
SB-14-18-.2	14"x18"	200 LB
SB-14-18-.5	14"x18"	500 LB
SB-14-18-1	14"x18"	1000 LB
SB-18-24-.2	18"x24"	200 LB
SB-18-24-.5	18"x24"	500 LB
SB-18-24-1	18"x24"	1000 LB
SB-20-20-.2	20"x20"	200 LB
SB-20-20-.5	20"x20"	500 LB
SB-20-20-1	20"x20"	1000 LB
SB-24-24-.2	24"x24"	200 LB
SB-24-24-.5	24"x24"	500 LB
SB-24-24-1	24"x24"	1000 LB
MB-1212-#	12"x12"	25 LB
to	to	to
MB-1616-#	16"x16"	500 LB

Options

Carbon or stainless steel.
Custom sizes. Precalibrated indicator.
Smooth or diamond deck.
2000 lb Cap. Available

Accessories

Digital Indicators
Indicator Column
Scale Cart
Portability Kit
Adj. Height Carts & Tables
Stainless Shroud

Scale is: Constructed of mild steel with checkered safety plate. (Or smooth deck)

Painted: With Sherwin-Williams safety blue alkyd enamel.


Scale Supplied: With 1 beam load cell, and 15' indicator cable.

Safe Overload: 150% of rated capacity.

Safe Sideload: 100% of rated capacity.

Performance: Designed to meet or exceed-NIST H-44 for class III scales.

Indiana Scale Company, Inc.
Terre Haute, IN 47807

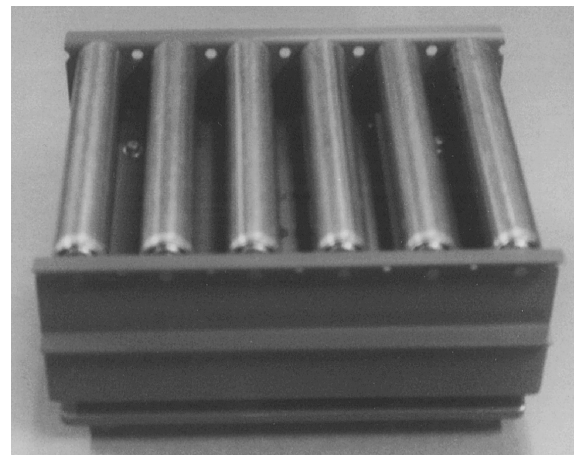

Distributed By: